

# Endur E5

1200 x 800



## 3-runner plastic pallet with extra high safety rim

With its load capacity of 500 kg in the high rack the Endur E5 is made for medium loads and is best for applications with a high circulation rate. The 20 mm high safety rim is slightly set outward, so that KLT boxes can be placed within the rim and be transported safely. Therefore the pallet is especially used in the automotive industry. The high quality design made the pallet extremely strong and guaranteed a long lifetime.

### Bottom support



> 3 runners (3R)

### Deck options



> closed deck (CD)



Curved sloping ramps up and down the internal blocks.



Safety rim ensures easy transportation of empty pallet stacks.




20 mm high safety rim provides optimum support for KLT boxes.

## Technical data\*<sup>1</sup>

	Bottom support	Top deck	Dimensions [mm]	Load capacities* <sup>2</sup> [kg]			Weight [kg]		Pallets per	
				Static	Dynamic	Racking	HDPE	PO	Stack	Truck
Endur E5 (CD-3R)	3 runners	closed	1214 x 814 x 158	5000	1500	500	18,0	—	—	—

Entry: 4 ways | Nesting height: — | Safety rim: 20 mm

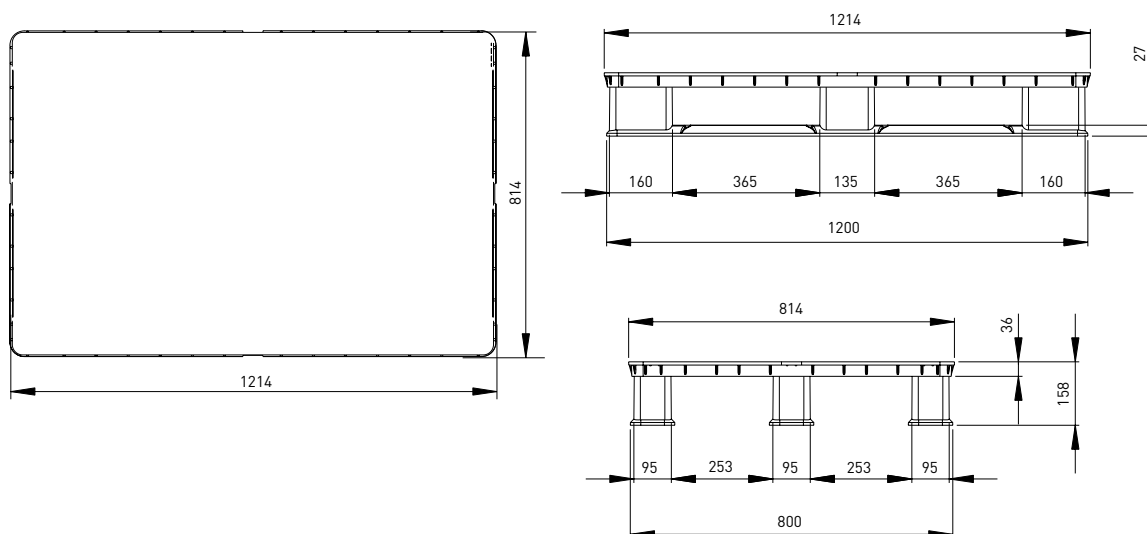

nominal sizes in mm

## Options

Color:  [other colors on request\*<sup>3</sup>]

> Individual marking\*<sup>3</sup>

Anti-slip: safety rim (standard)

ESD prevention: —



\*<sup>1</sup> Figures can vary depending on the raw material used and options applied. \*<sup>2</sup> Guideline values are based both on experience and parts of test ISO 8611, which tests with evenly distributed loads at room temperature (20°C). Varying data may result from different conditions of usage. Your specific requirements can be identified upon request. \*<sup>3</sup> Minimum quantity required - PO pallets should only be used and stored in a dry environment. We reserve the right to change any of the stated information without prior notice.