

Nest C5.2

45 x 45

CPP 440 | CPP 440c | CPP 446 | CPP 446c



Nestable container plastic pallet

These container-size pallets leave no empty storage space. Optimized for transport in ISO freight containers, the pallet uses the available load space. There is a choice of three dimensions (Nest C5 = 43 x 43, Nest C5.1 = 44 x 44). All sizes come with an open or closed upper deck. Besides the nestable version (9 feet), the pallet is also available with 6 runners (cruciform perimeter base) and can therefore be used for block stacking.


Bottom support



> 9 feet (9F)



> 6 runners (6R)



Optional without safety rim

Deck options



> open deck (OD)



> closed deck (CD)



Rounded edges




Easy handling

Technical data*1

	Previous name	Bottom support	Top deck	Dimensions [in] / [mm]	Load capacities*2 [lbs] / [kg]			Weight [lbs] / [kg]			
					Static	Dynamic	Racking	HDPE		ACM	
Nest C5.2 (OD-9F)	CPP 440	9 feet, nestable	open	44.9 x 44.9 x 5.5	8800	3300	—	25.5	11.5	27.5	12.5
Nest C5.2 (CD-9F)	CPP 440c		closed	1140 x 1140 x 140	4000	1500		27.5	12.5	30.0	13.5
Nest C5.2 (OD-6R)	CPP 446	6 runners	open	44.9 x 44.9 x 6.4	17600	5300	1300	32.0	14.5	36.5	16.5
Nest C5.2 (CD-6R)	CPP 446c		closed	1140 x 1140 x 163	8000	2400	600	34.0	15.5	38.5	17.5

Entry: 4 ways | Nesting height: 2.4 in / 60 mm | Safety rim: 0.2 in / 5 mm (optional without)

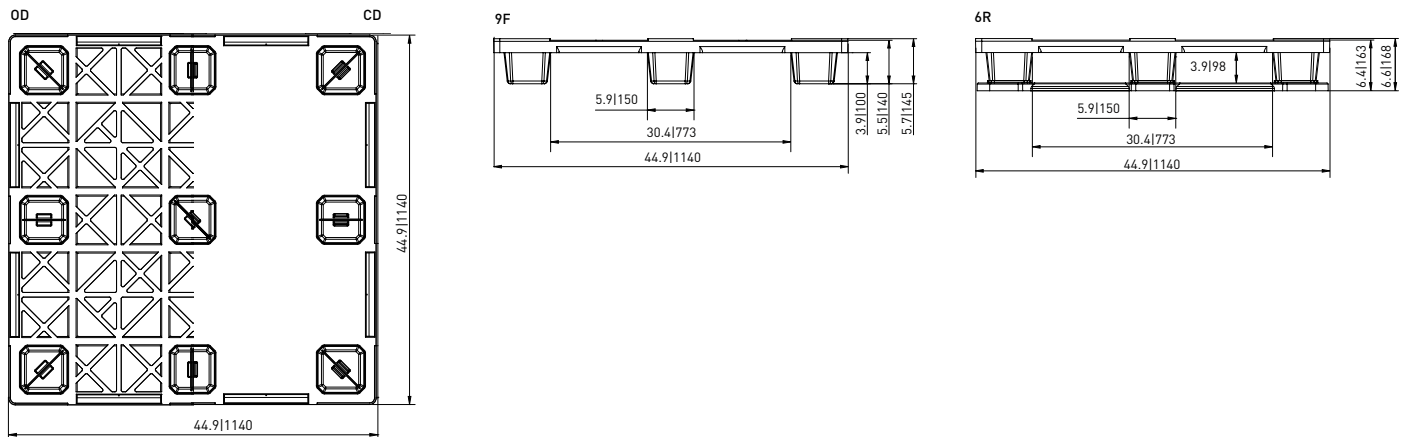

nominal sizes in inch | mm

Options

Color: (other colors on request*3)

> Individual marking*3

Anti-slip: safety rim

ESD prevention: —

*1 Figures can vary depending on the raw material used and options applied. *2 Guideline values are based both on experience and parts of test ISO 8611, which tests with evenly distributed loads at room temperature (68°F / 20°C). Varying data may result from different conditions of usage. Your specific requirements can be identified upon request. *3 Minimum quantity required ACM pallets should only be used and stored in a dry environment. We reserve the right to change any of the stated information without prior notice.